


For professional use only. Please refer to the conditions of use of our catalogue.

Ind. e - Revision : 04-2010

2GRE45 160x62R



P/N N05-58

Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature
V	Hz	W a	A	µF	m³/h	RPM	dBA	↻	Min / Max
230	50	253	1,12	6,0	640	2 110	70	R	-20°C / +70°C
230	60	272	1,19	5,0	525	2 040	67	R	-20°C / +50°C
230	50				376 CFM				-4°F / +158°F
230	60				309 CFM				-4°F / +122°F

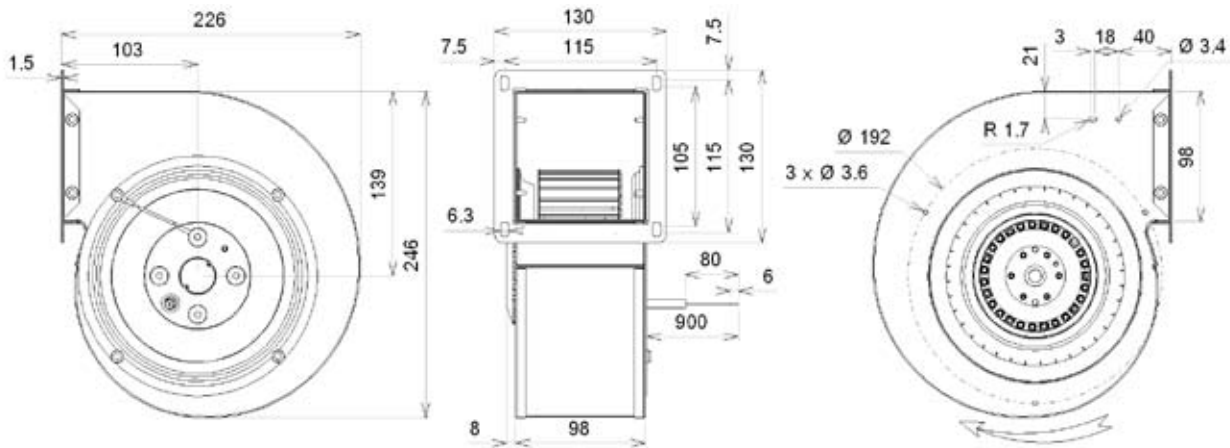

Rotation "CW"

- Weight : 4,1 Kg
- Ball bearing
- Class F, thermally protected
- IP44 protection
- G2.5 balancing
- Galvanized steel impeller
- Rotor : black paint
- Scroll housing : black paint

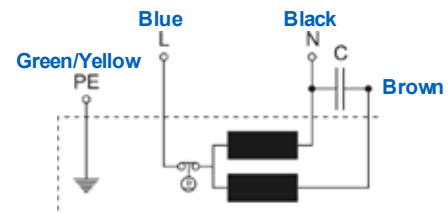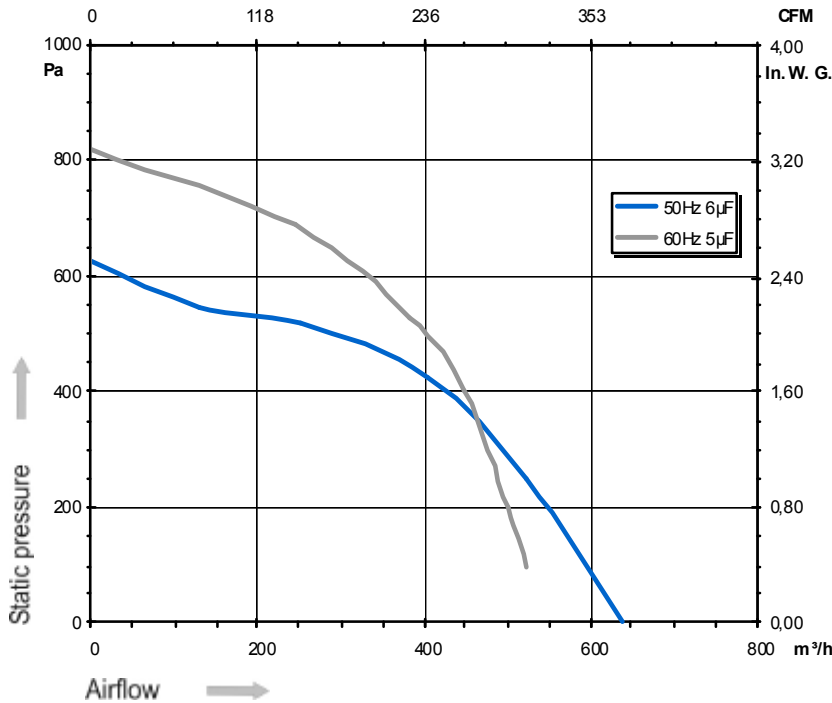

Non contractual document. All specifications are subject to change without prior notice. Picture for information only.